

XR2C Radio Receiver

QUICK INSTALLATION GUIDE

STEP 1




Wire the Receiver to the Control Board.

STEP 2

Press the “SW1” button for 1 second. The corresponding LED (DL1) will flash for 5 seconds.

STEP 3 - within 5 seconds

Press and hold the desired Transmitter button until the receiver’s DL1 LED illuminates solid for 1 second, indicating that the programming has been completed.

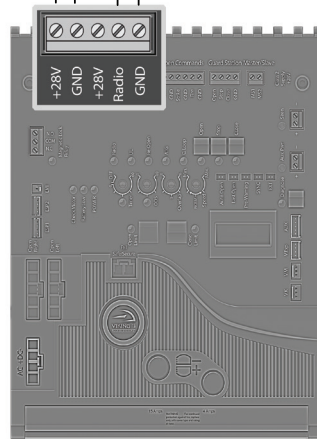

FA-XR2C	“Radio Station”
+	+28V
-	GND
COM	GND
N.O.	Radio

Wiring Table and Diagram are provided for reference and applies to all Viking Operator Models.

To Erase all Stored Codes:

Press the “SW1” button for 10 seconds. The DL1 LED will flash, illuminate steady, then turn off indicating the codes have been erased.